

**Model: 48NPFC100 (19")**

**NPFC Series**

Narada NPFC series is a complete range of 48V LiFePO<sub>4</sub>(Lithium Iron phosphate) battery products, for a wide variety of applications, such as telecom base station, UPS, renewable energy system, etc., with advanced life, standard size, light weight and strong environmental adaptability.


**Battery Management System(BMS)**

For standard Narada lithium battery module, BMS is applied to monitor voltage, current, temperature of cells and module, take protections against over-charge, over-discharge, over-current, over-temperature, under-temperature and short circuit, etc., and provide cell balancing and current limitation during charging process to ensure a reliable safety and excellent performance.

Meantime, Narada supply customized upper computer software for BMS communication via RS485 to set parameters or read monitoring data.



**Dimensions-mm**

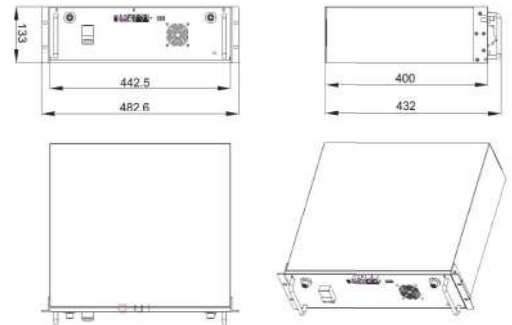

**Specifications**

Battery Specification		15S
Rated Voltage		48V
Rated Capacity		100Ah (0.2C to 40.5V @ 25 °C)
Discharge Current (Max.)		100A
Discharge End Voltage		40.5V
Charge Current (Recomm.)		20A
Charge Current (Max.)		100A
Charge Voltage		54.0±0.5V
Dimensions	Width	442.5 mm
	Depth	400 mm
	Height	133 mm
Typical Weight		Approximate 38.5 Kg
Layout of Front Panel		
Status Indicators		SOC / ALM / RUN
Communication Ports		RS232 / RS485*2
Communication in Parallel		8 modules in parallel maximum
Reset Key		Available
Terminal Size		M8 (Screw size)
Breaker		Available
Dry Contact		Available
Operation Environments		
Temperature Range	Discharge	-20 to + 60°C
	Charge	0 to + 60°C
	Storage	0 to + 40°C
Temperature Recommendation	Discharge	+15 to + 35°C
	Charge	+15 to + 35°C
	Storage	+15 to + 30°C
Humidity		5% to 95%

## Model: 48NPFC100 (19")

## NPFC Series



### Constant Current Discharge Characteristics /for one module (25°C,77°F)

End voltage	Current(A)	0.1C	0.2C	0.33C	0.5C	0.8C	1.0C
	Time						
		Hours					
46.5V		9.73	4.85	2.93	1.90	1.15	0.90
45.0V		9.92	4.96	3.00	1.96	1.20	0.93
43.5V		10.05	5.03	3.05	2.00	1.23	0.96
42.0V		10.13	5.07	3.08	2.02	1.25	0.98
40.5V		10.18	5.10	3.09	2.03	1.26	1.00

### Discharge Data with Constant Power /for one module (25°C,77°F)

End voltage	Power	480W	960W	1580W	2400W	3800W	4400W
	Time						
		Hours					
46.5V		9.83	4.89	2.92	1.85	1.05	0.82
45.0V		10.02	4.99	3.01	1.91	1.11	0.86
43.5V		10.13	5.05	3.05	1.95	1.15	0.90
42.0V		10.21	5.09	3.08	1.98	1.18	0.93
40.5V		10.25	5.12	3.09	2.00	1.20	0.95

### Performance Curves

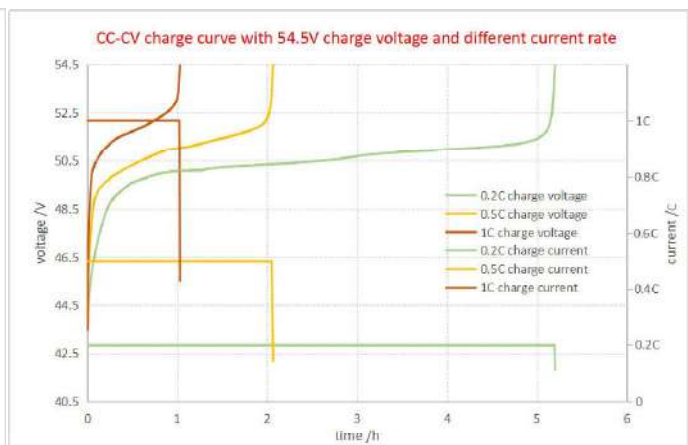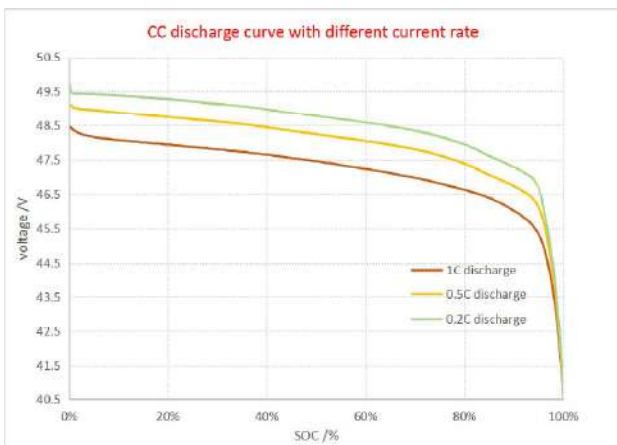

**Narada**

Abdulmajeed AL-Wabnani Trading Group (ATG)  
Yemen Sana'a Hada St. Near to AL-Gharasi building  
TEL: +967 1 211764 MOBILE: +967 777222725



مجموعة عبدالمجيد الوهباني للتجارة  
اليمن - صنعاء - حدة جوار عمارة الغراسي  
تلفاكس / ٢١١٧٦٤ جوال ٧٧٧٢٢٢٧٢٥



For sales, service and other enquiries,  
email us info@atg-ye.com



للمبيعات، الخدمات والطلبات الاخرى  
راسلنا على info@atg-ye.com

